



Powered by Menasha Corporation

PRODUCT SPEC SHEET

4048 ODYSSEY® LOW PROFILE PALLET

The efficient handling of palletized product in automated systems is key to building an effective, economical and sustainable supply chain.


The 40 x 48 Odyssey Low Profile (OLP) pallet is a dimensionally consistent, reusable pallet designed to provide repeatable performance with automated equipment. With the same stability and unique features of the original 40x48 Odyssey pallet, the new low profile 5.6-inch height aims to bring the added benefit of seamlessly integrating in existing pallet pools.

- **Compatible** – Seamlessly integrates with wood block pallets
- **Automation-friendly** – Precisely molded for use in automated systems
- **Truckload efficiency** – Low profile height maximizes truckload space
- **Load stability** – Permanent, molded-in frictional elements minimize load shifting and do not damage product loads
- **Impact resistant** – Robust and highly resistant to impact from equipment, ideal for rugged applications
- **Hygienic** – Flow-through, hygienic design for easy cleanability

Applications:

- Club store shipments
- General food processing, including cold and frozen storage of meat, bakery, produce and dairy
- Dry goods including apparel, pharmaceuticals and other consumer packaged goods
- Agriculture, including seed and farm materials

ORBIS' latest innovation builds on the success of decades of pallet innovation, from materials to design. Contact ORBIS today to learn more.

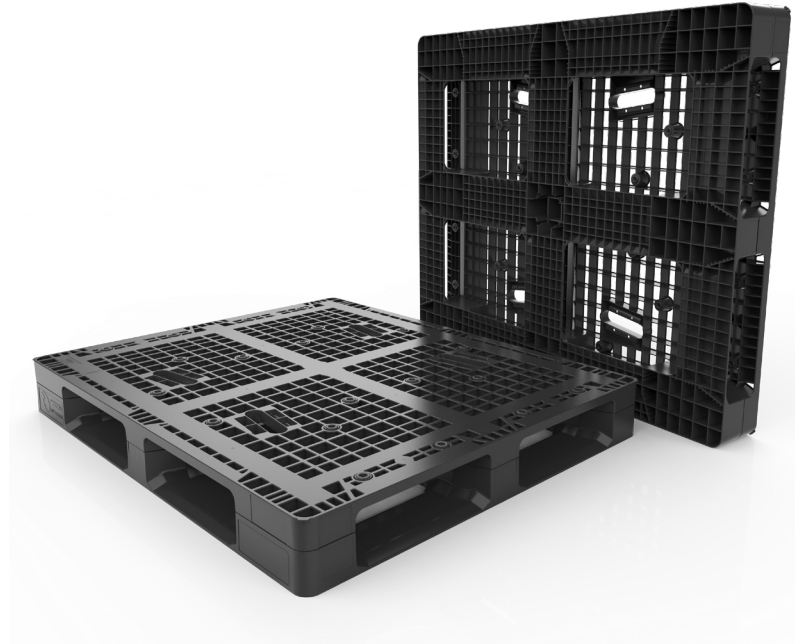


Minimize load shifting with optional molded-in frictional elements (*offered in black only*)



Smooth surfaces do not damage product




Low profile 5.6" pallet height maximizes truckload quantities

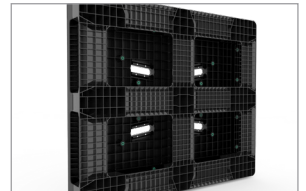

Seamless conveyance with full stringer bottom


PRODUCT SPEC SHEET

4048 ODYSSEY® LOW PROFILE PALLET

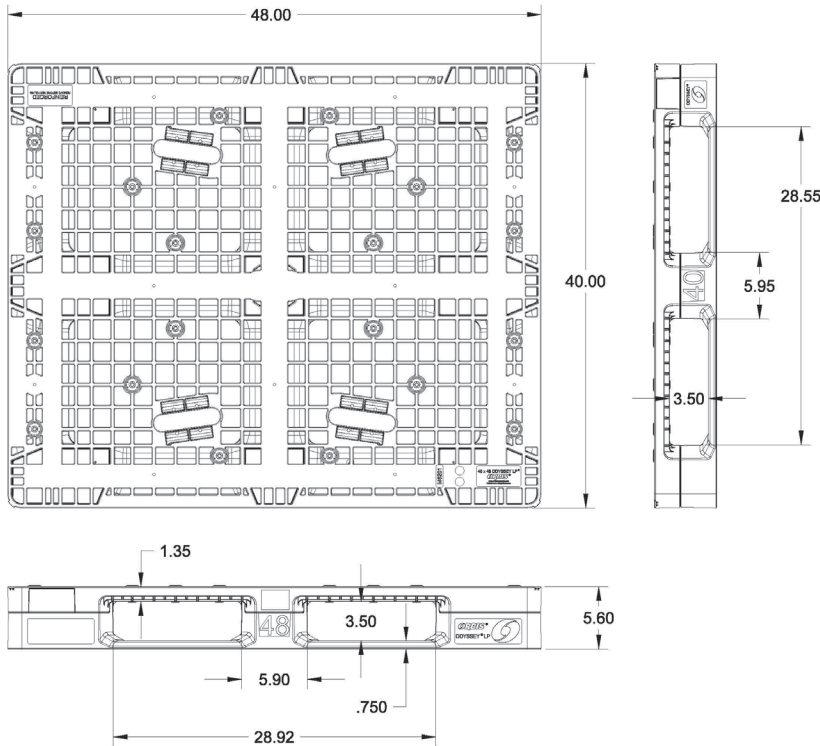

Optional Features:

- Frictional elements
- Molded logos
- Hot stamps
- Track and trace

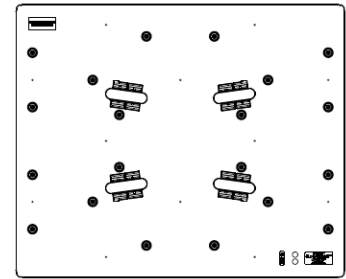

Frictional Element Configuration (20)

4048 Odyssey Low Profile Pallet Specifications

Dimensions (in/mm)			Weight (lbs/kg)	Load Capacity (lbs/kg)		Rack Rating (lbs/kg)		40' Truckload Qty.	53' Truckload Qty.
L	W	H		Static	Dynamic	Selective Edge	Decking Center		
48.0	40.0	5.6	54.0	30,000	6,000	2,800	6,000	378	570
1,219	1,016	142	24.5	13,608	2,722	1,270	2,722		